

A.H. Harris & Sons, Inc.



CONSTRUCTION SPECIALTIES

Since 1916

Silt Fence

DESCRIPTION


Harris Silt Fence with attached hardwood posts is self supporting, UV stabilized polypropylene silt fence designed to contain sediment runoff. Also available with plastic mesh backing.

SPECIAL FEATURES

- Depth gauge that ensures adequate toe-in of the silt fence.
- Treated to ensure protection against sunlight degradation.
- Very economical.
- Attached 4' oak posts.

INSTALLATION

1. Dig a 4" to 6" trench along the intended fence line.
2. Lay out Silt Fence along the trench line.
3. Stretch Silt Fence tautly.
4. Drive all posts into the ground at back side of fence.
5. Drape bottom 6" of Silt Fence (red gauge line) in trench, backfill with soil and compact.

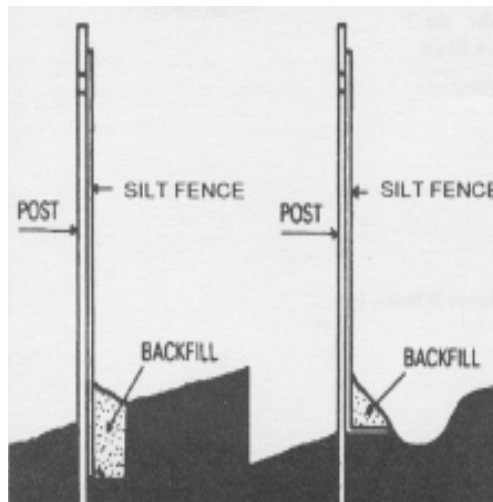

Connecticut
Danbury
 (203)791-9308
Newington
 (860)665-9400
Stamford
 (203)978-9055
Waterford
 (860)437-7815
Maine
Augusta
 (207)622-0821
Bangor
 (207)262-6276
Fryeburg
 (207)935-3531
Portland
 (207)775-5764
Massachusetts
Boston
 (617)269-4800
Buzzards Bay
 (508)759-9990
Chicopee
 (413)535-0248
Medfield
 (508)359-7321
Raynham
 (508)884-5070
Woburn
 (781)376-9636
Worcester
 (508)767-0200
New Hampshire
Manchester
 (603)644-4970
Portsmouth
 (603)436-3833
West Lebanon
 (603)298-6072
New Jersey
Fairfield
 (973)227-1600
Old Bridge
 (732)727-8080
Sayreville
 (732)651-7822
Moonachie
 (201)438-0999
New York
Albany
 (518)438-3976
Brooklyn
 (718)254-8000
Massena
 (315)764-0241
Newburgh
 (845)566-4040
Oneonta
 (607)431-0011
Orchard Park
 (716)667-3355
Plattsburgh
 (518)561-2525
Rochester
 (585)426-2090
Staten Island
 (718)876-7500
Syracuse
 (315)452-1080
Watertown
 (315)785-0150
Yonkers
 (914)964-0101
Rhode Island
Warwick
 (401)737-5136
Vermont
Williston
 (802)863-3302
Virginia
Bristol
 (276)642-0451
Charlottesville
 (434)979-9902
Hampton
 (757)838-5745
Norfolk
 (757)622-7249
Richmond
 (804)358-7191
Salem
 (800)468-0155

HARRIS SILT FENCE MINIMUM PHYSICAL PROPERTIES

		Propex 2130	
Property	Test Method	American Standard	Metric
Grab Tensile	ASTM D-4632	124 X 124 lbs	550 X 550N
Grab Elongation	ASTM D-4632	15%	15%
Mullen Burst	ASTM D-3786	300 psi	2060kPa
Puncture	ASTM D-4833	65 lbs	285N
Trapezoidal Tear	ASTM D-4533	65 lbs	285N
U.V. Resistance (strength retained)	ASTM D-4355	80% @ 500 hrs	80% @ 500 hrs
Apparent Opening Size	ASTM D-4751	#30 Sieve	0.60 mm
Permitivity	ASTM D-4491	0.1 sec ⁻¹	0.1 sec ⁻¹
Flow Rate	ASTM D-4491	8 gal/min/ft ²	325l/min/m ²

MESH BACKING SPECIFICATIONS

Material	Polypropylene
Color	Orange
Strand Count	2.7 x 2.7
PMSF	7.34
Weight, G/sq. yd.	30.0
FDA Status	Conforms to CFT 117.1520
Tensile Strength	42-12 # Min. per 3"
U.V. Resistant	4% Carbon Black
Roll width (ft)	3
Roll Length (ft)	100

Silt fence fabric is manufactured for A.H. Harris & Sons, Inc. by Propex, Inc.

Limited Warranty

A.H. Harris & Sons, Inc. ("Harris") warrants that, at the time of shipment to its customers, the product it sells or rents conform to its usual standards and are free from defects which would materially affect the products' ability to perform as represented. IF ANY HARRIS PRODUCT IS PROVEN TO BE DEFECTIVE, THE CUSTOMER'S EXCLUSIVE REMEDY IS TO HAVE HARRIS REPLACE THE DEFECTIVE PRODUCT WITH A PRODUCT OF LIKE QUALITY OR AT HARRIS' OPTION, TO REFUND THE PURCHASE PRICE. IN NO EVENT SHALL HARRIS' LIABILITY, IF ANY, WHETHER FOUNDED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE) EXCEED THE PURCHASE PRICE OF THE DEFECTIVE PRODUCTS NOR SHALL HARRIS BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES OR FOR ANY CLAIM BROUGHT MORE THAN ONE YEAR AFTER THE SALE OF THE PRODUCT BY HARRIS TO ITS CUSTOMER. THE FOREGOING WARRANTIES ARE EXCLUSIVE AND HARRIS MAKES NO OTHER WARRANTIES WITH RESPECT TO ITS PRODUCTS, EXPRESS OR IMPLIED, INCLUDING NO WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. Harris does not intend any of its products to be used in a way that would infringe any patent or copyright.